SOT-23 Encapsulate Three Terminal Voltage Regulator

FEATURES

Maximum Output current IO: 0.1 A

Output voltage Vo: 5 V

Continuous total dissipation

PD: 0.35 W (Ta= 25 ℃)

SOT-23



1、 OUT
2、 IN
3、 GUT


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+125	℃
Storage Temperature Range	T_{STG}	-55~+150	℃

ELECTRICAL CHARACTERISTICS (V_i=10V,Io=40mA,Ci=0.33μF,Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions		MIN	TYP	MAX	UNIT
Output voltage	Vo		25℃	4.8	5.0	5.2	V
		7V≤Vi≤20V, Io=1mA~40mA	0-125℃	4.75	5.0	5.25	V
		Io=1mA~70mA		4.75	5.0	5.25	V
Load Regulation	ΔVo	Io=1mA~100mA	25℃		15	60	mV
		Io=1mA~40mA	25℃		8	30	mV
Line regulation	ΔVo	7V≤Vi≤20V			32	150	mV
		8V≤Vi≤20V	25℃		26	100	mV
Quiescent Current	Iq		25℃		3.8	6	mA
Quiescent Current Change	ΔIq	8V≤Vi≤20V	0-125℃			1.5	mA
	ΔIq	1mA≤V_I≤40mA	0-125℃			0.1	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25℃		42		uV
Ripple Rejection	RR	8V≤Vi≤20V, f=120Hz	0-125℃	41	49		dB
Dropout Voltage	Vd		25℃		1.7		V


TYPICAL APPLICATION

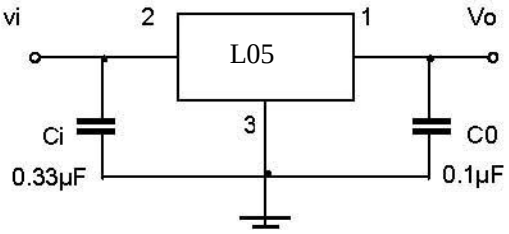


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

Typical Characteristics


L78L05/12/24 Output Characteristics

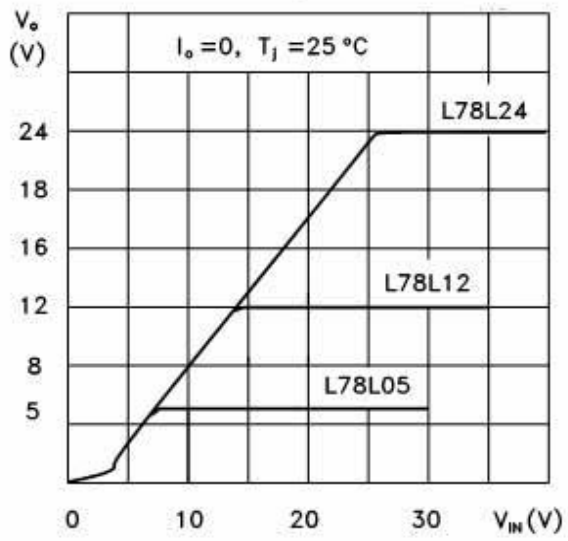


L78L05/12/24 Load Characteristics

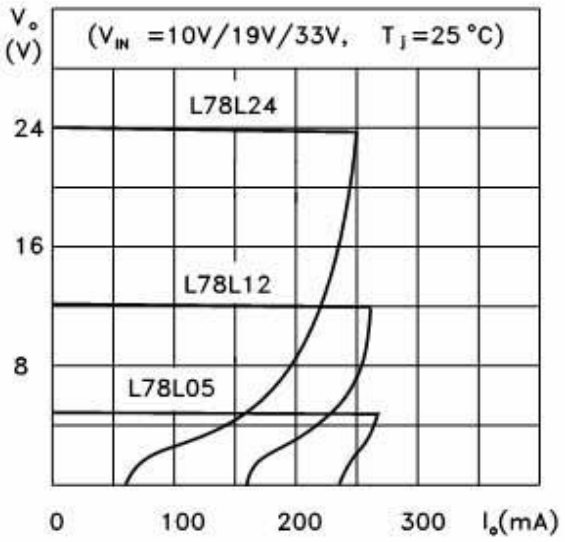


L78L05/12/24 Thermal Shutdown

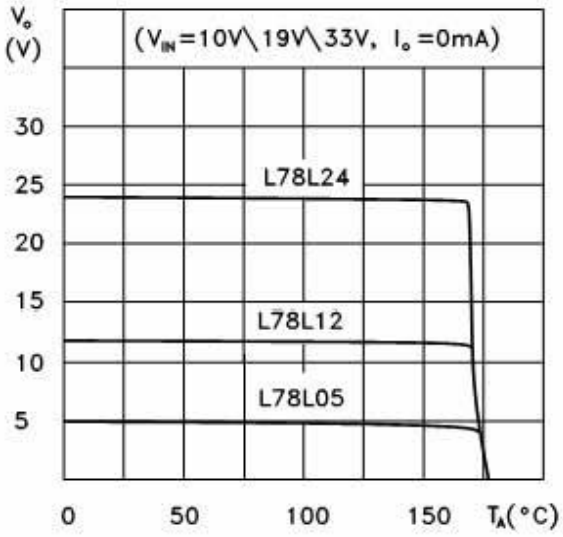



L78L00 Series Short Circuit Output Current

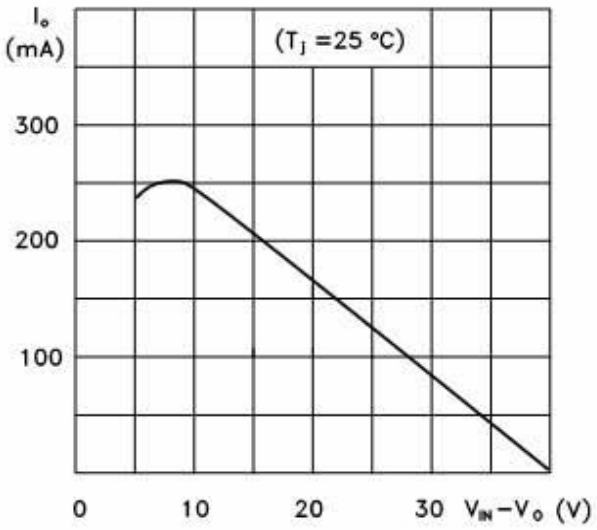


L78L05 Quiescent Current vs Input Voltage

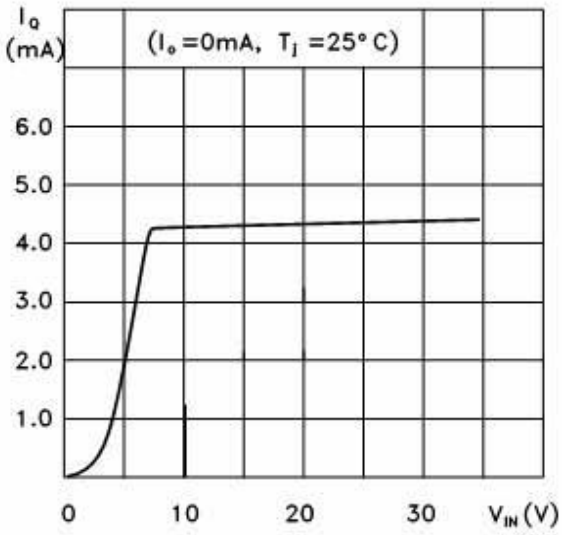








Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.