
DTC143E Series

NPN Digital Transistors

■ Features


- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

Equivalent Circuit

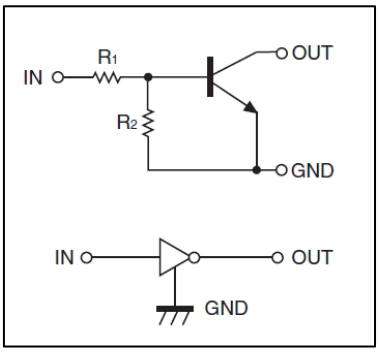


■ Pin Connenctions And Marking

DTC143ECA — **SOT-23**




1. IN
2. GND
3. OUT

DTC143EKA — **SOT-23-3L**




1. IN
2. GND
3. OUT

DTC143EUA — **SOT-323**




1. IN
2. GND
3. OUT

DTC143EE — **SOT-523**



1. IN
2. GND
3. OUT

DTC143EM — **SOT-723**



1. IN
2. GND
3. OUT


■ Absolute Maximum Ratings Ta = 25℃

Symbol	Parameter	Limits(DTC143E□)						Unit
		M	E	UA	KA	CA	SA	
V_{CC}	Supply Voltage	50						V
V_{IN}	Input Voltage	-10～+30						V
I_O	Output Current	100						mA
P_D	Power Dissipation	100	150	200	200	200	300	mW
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55～+150						℃


■ Electrical Characteristics Ta = 25℃

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	V_{CC}=5V,I_O=100μA	0.5			V
	$V_{I(on)}$	V_O=0.3V,I_O=20mA			3	V
Output voltage	$V_{O(on)}$	I_O/I_I=10mA/0.5mA			0.3	V
Input current	I_I	V_I=5V			1.8	mA
Output current	$I_{O(off)}$	V_{CC}=50V,V_I=0			0.5	μA
DC current gain	G_I	V_O=5V,I_O=10mA	20			
Input resistance	R_1		3.29	4.7	6.11	kΩ
Resistance ratio	R_2/R_1		0.8	1	1.2	
Transition frequency	f_T	V_O=10V,I_O=5mA,f=100MHz		250		MHz


ON Characteristics

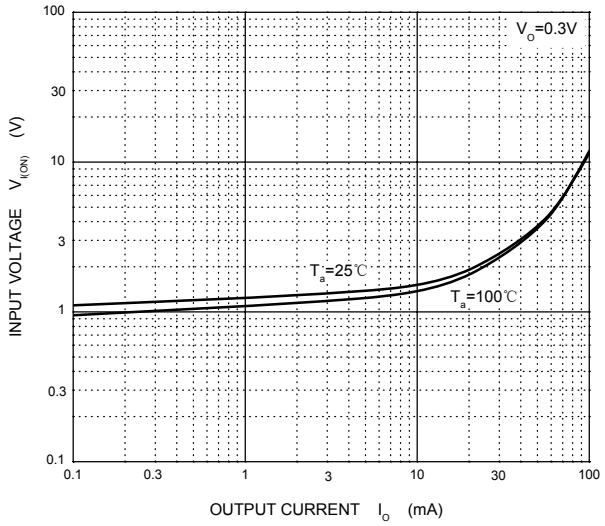


OFF Characteristics

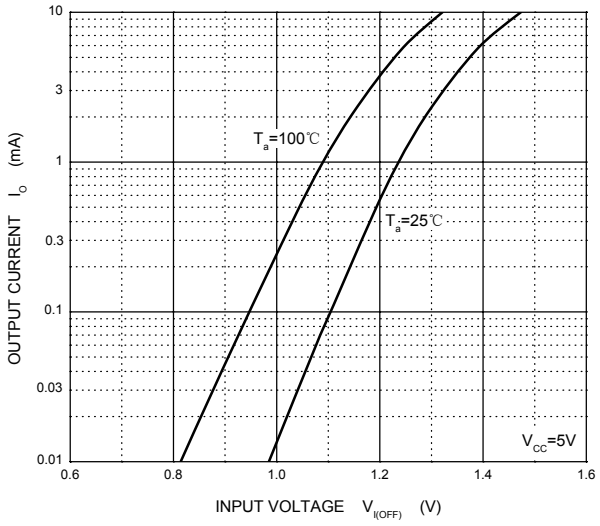


$V_{O(ON)}$ —— I_O

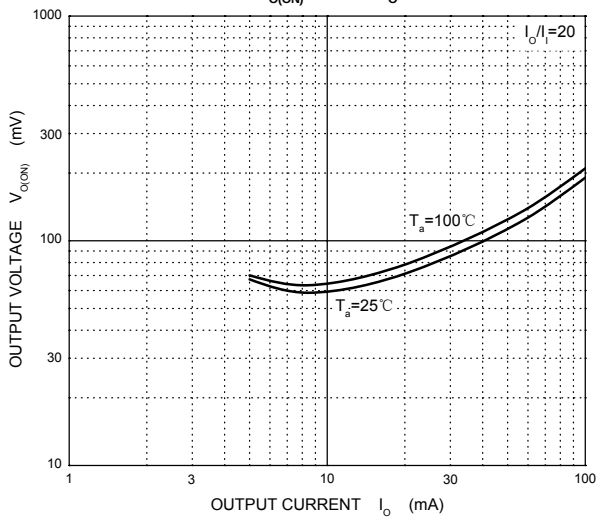


G_I —— I_O

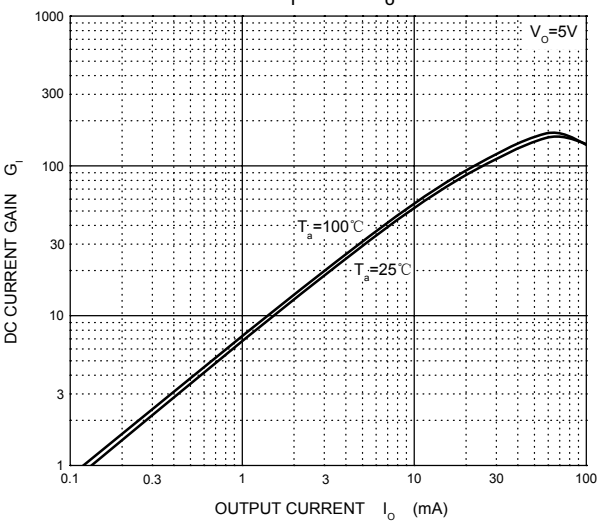


C_O —— V_R

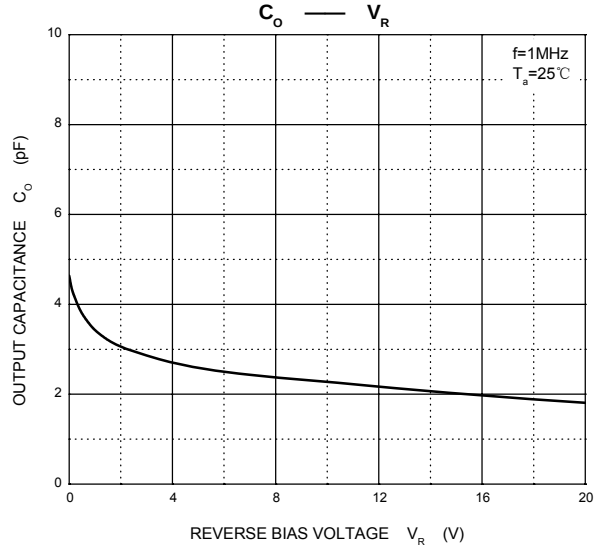


P_D —— T_a

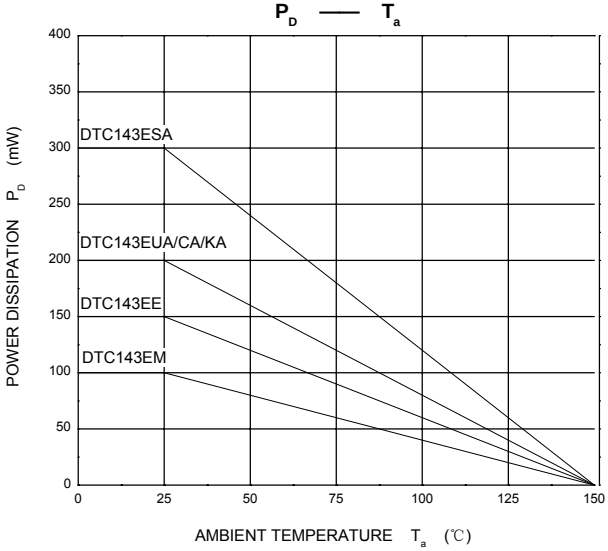

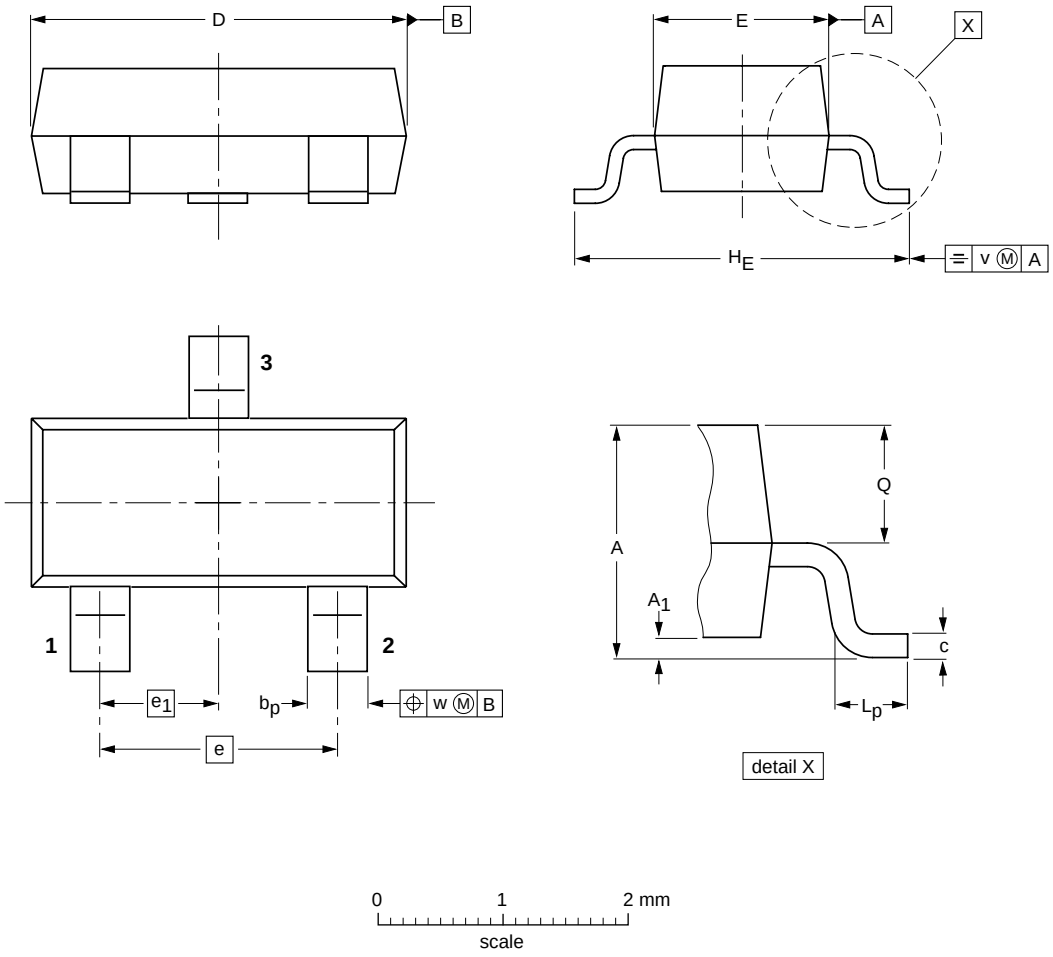


DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max.	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

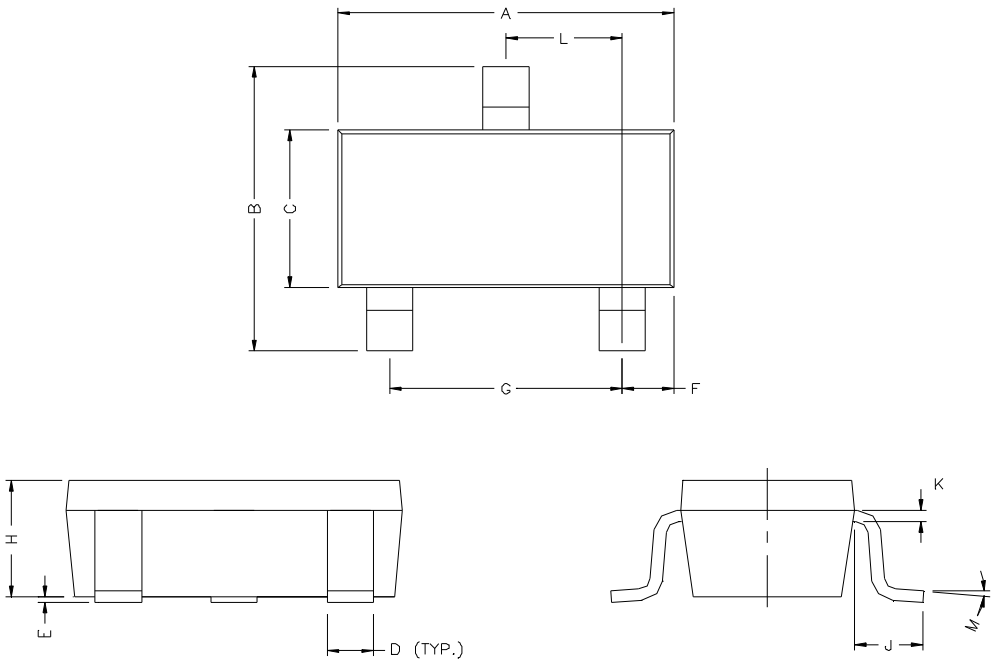


DIMENSIONS (mm are the original dimensions)

UNIT	A	B	C	D	E	F	G	H	K	J	L	M
mm	2.70 3.10	2.65 2.95	1.50 1.70	0.35 0.50	0 0.10	0.45 0.55	1.9	1.00 1.30	0.10 0.20	0.40 -	0.85 1.15	0° 10°

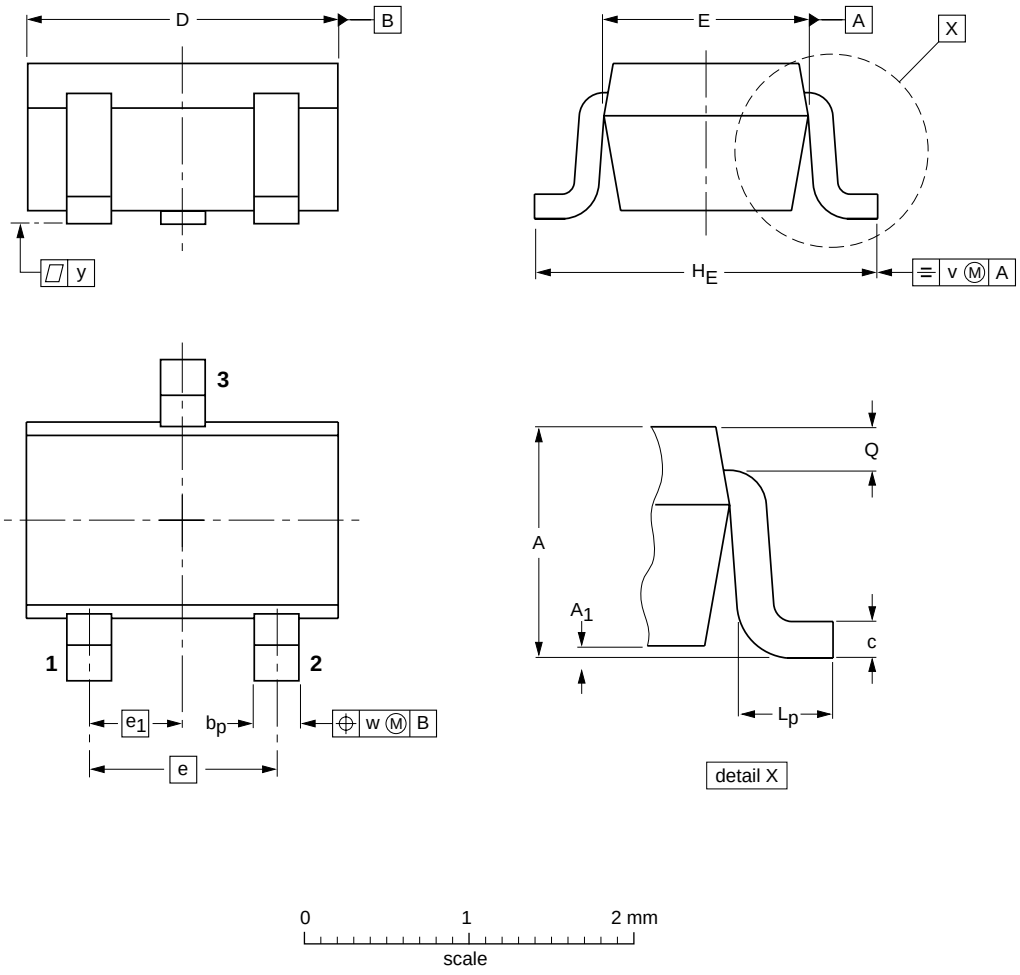


DIMENSIONS (mm are the original dimensions)


UNIT	A	A_1 max	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

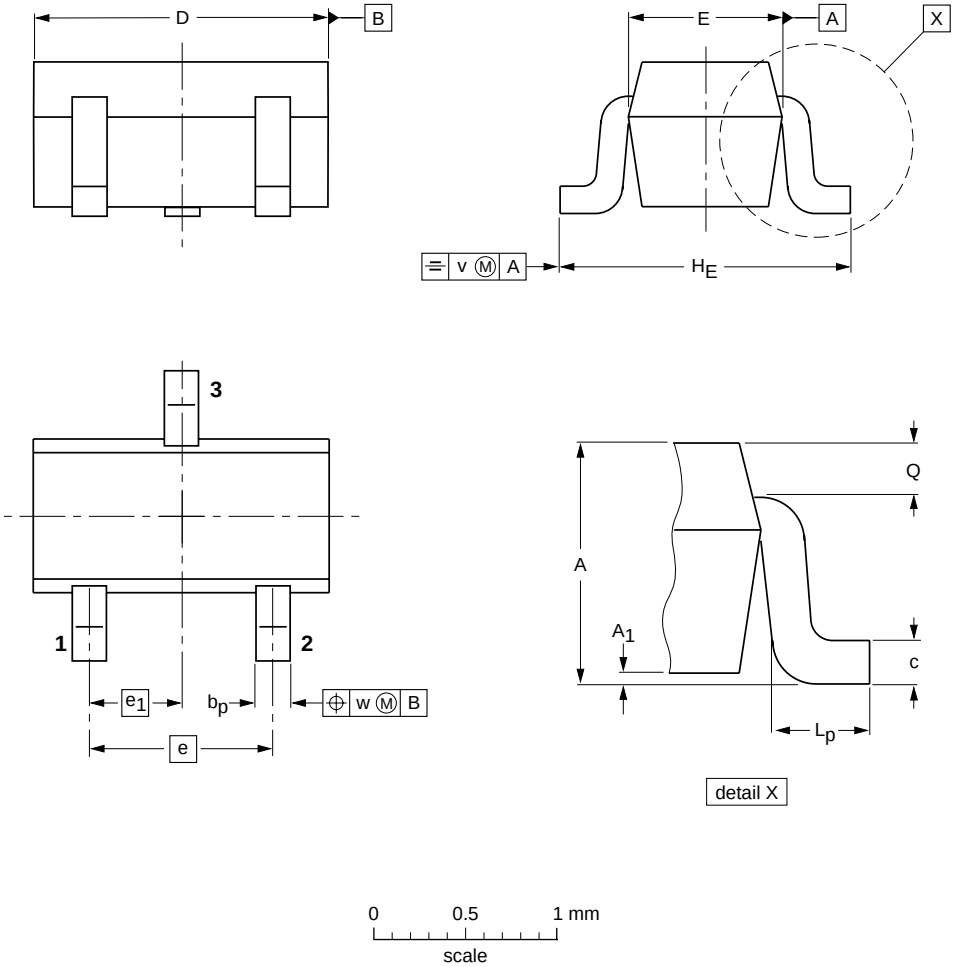

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	0.95 0.60	0.1	0.30 0.15	0.25 0.10	1.8 1.4	0.9 0.7	1	0.5	1.75 1.45	0.45 0.15	0.23 0.13	0.2	0.2

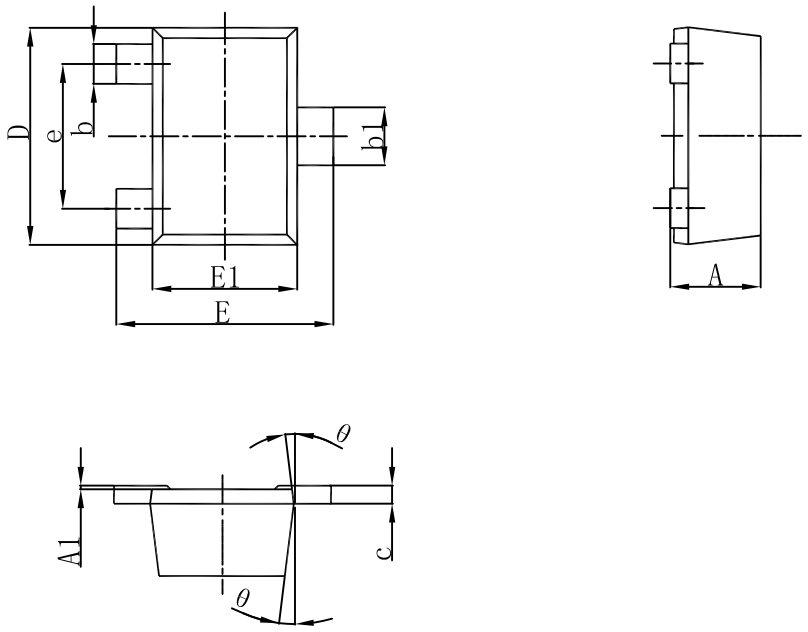



DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max	b	b1	c	D	E	E1
mm	0.43 0.50	0.05	0.17 0.27	0.27 0.37	0.08 0.15	1.15 1.25	0.15 0.25	0.75 0.85