
DTC143ECA

NPN Digital Transistors

Features


- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

SOT-23



1. IN
2. GND
3. OUT

Equivalent Circuit



ORDERING INFORMATION

Part Number	MARKING(1)	Package	Packing Method	Pack Quantity
DTC143ECA	**E23**	SOT-23	Reel	3000pcs/Reel

Notes: (1). Solid dot = Green molding compound device, if none, the normal device.
(2). XXX=Code


Absolute Maximum Ratings Ta = 25℃

Symbol	Parameter	Limits						Unit
V_{CC}	Supply Voltage	50						V
V_{IN}	Input Voltage	-10～+30						V
I_O	Output Current	100						mA
P_D	Power Dissipation	100	150	200	200	200	300	mW
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55～+150						℃


Electrical Characteristics Ta = 25℃

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	V_{CC}=5V,I_O=100μA	0.5			V
	$V_{I(on)}$	V_O=0.3V,I_O=20mA			3	V
Output voltage	$V_{O(on)}$	I_O/I_I=10mA/0.5mA			0.3	V
Input current	I_I	V_I=5V			1.8	mA
Output current	$I_{O(off)}$	V_{CC}=50V,V_I=0			0.5	μA
DC current gain	G_I	V_O=5V,I_O=10mA	20			
Input resistance	R_1		3.29	4.7	6.11	kΩ
Resistance ratio	R_2/R_1		0.8	1	1.2	
Transition frequency	f_T	V_O=10V,I_O=5mA,f=100MHz		250		MHz


ON Characteristics

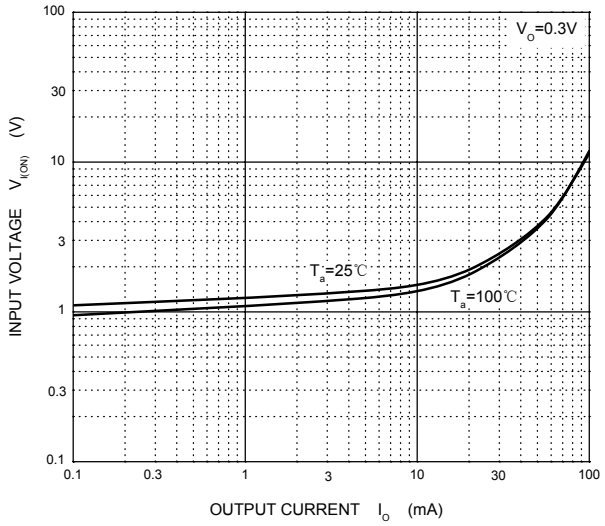


OFF Characteristics

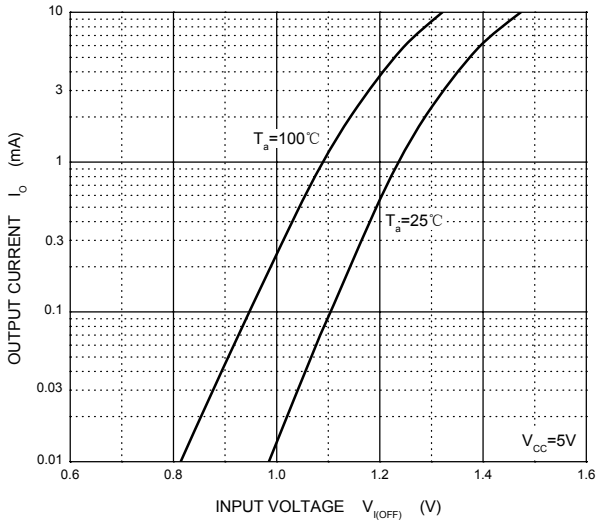


$V_{O(ON)}$ —— I_O

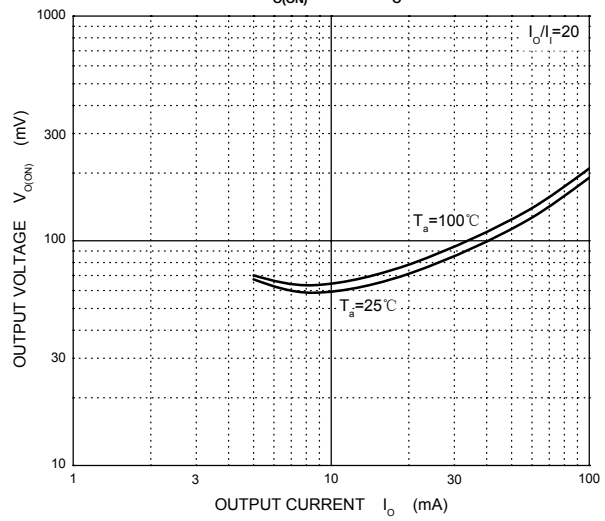


G_I —— I_O

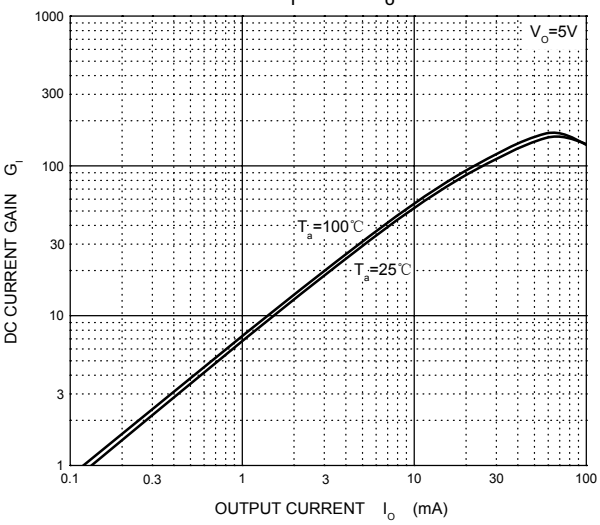



C_O —— V_R

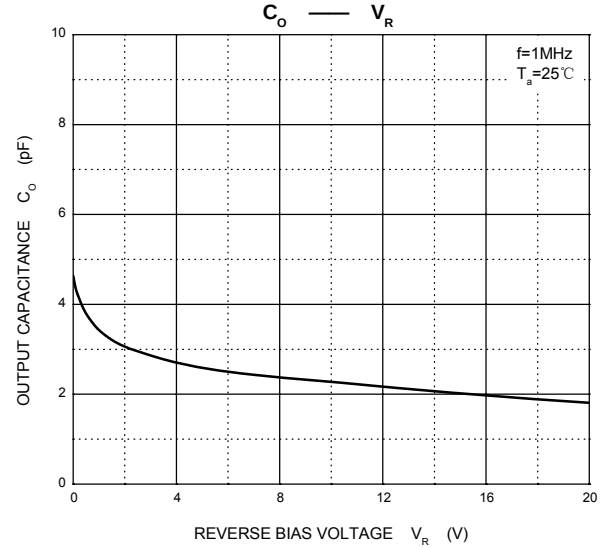


P_D —— T_a

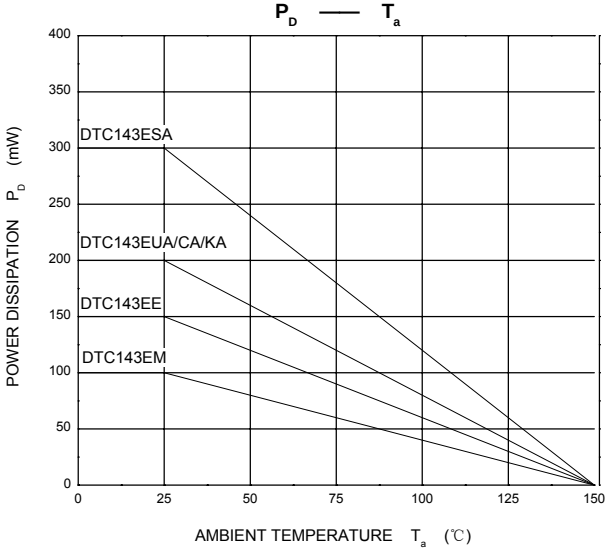








Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.