
Description

The TK78MXX series of three-terminal positive regulators are available in TO-252 package. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided,It can deliver over 1.0A output current, Although designed as fixed voltage regulator, This device can be used with external components to obtain adjustable voltage and currents.

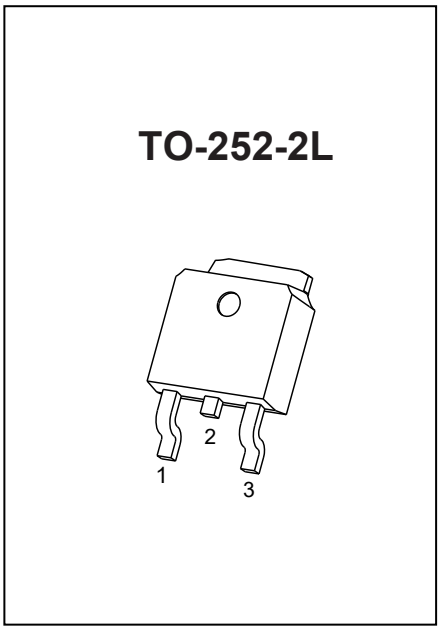


Features

- Input voltage: up to 35V
- Output voltage: 5V,6V,8V,9V,10V,12V,15V
- Output current up to 1.0A
- Thermal overload protection
- Short circuit current limiting


Applications

- DC motor drivers
- Household electric appliances
- Industrial power supplies
- Test and measurement equipment


Ordering Information

Orderable Device	Package	Reel (inch)	Package Qty (PCS)	Eco Plan Note	MSL Level	Marking Code
TK78M05	TO-252	13	2500	RoHS & Green	MSL3	
TK78M06						
TK78M08						
TK78M09						
TK78M10						
TK78M12						
TK78M15						

Function Block Diagram

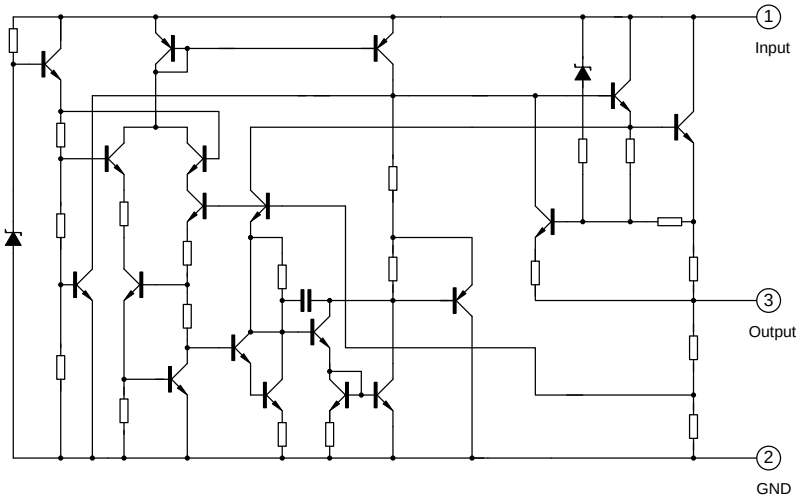

Typical Application Circuit

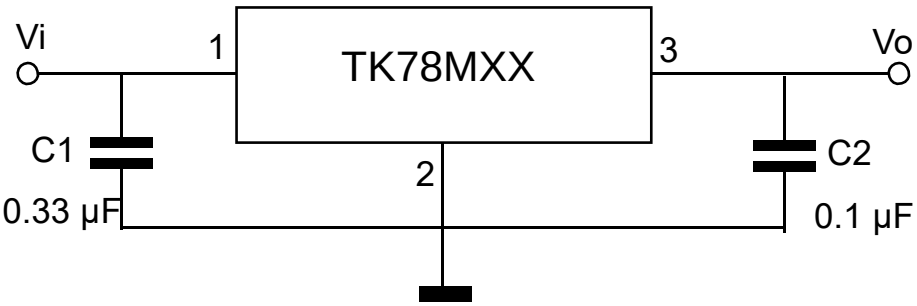

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Input Voltage	V_I	35	V
Output Current	I_O	1	A
Maximum Power Dissipation	P_D	1.5	W
Operating Temperature Range	T_{OPR}	-40 to +125	°C
Storage Temperature Range	T_{STG}	-65 to +150	°C

TK78M05 **Electrical Characteristics**

V_I=10V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	4.8	5.0	5.2	V
		I_O=5mA to 1A, V_I=8V to 20V, P_D<15W	4.75	5.0	5.25	V
Line Regulation	$\triangle V_O$	V_I=7.5V to 25V,T_J=25°C	--	--	100	mV
		V_I=8V to 12V,T_J=25°C	--	--	50	mV
Load Regulation	$\triangle V_O$	I_O=5mA to 1A,T_J=25°C	--	--	100	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	50	mV
Ripple Rejection	RR	V_I=8V to 18V, f=120Hz	62	73	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	$\triangle V_O/\triangle T$	I_O=5mA	--	0.8	--	mV/°C
Quiescent Current Change	$\triangle I_Q$	V_I=8V to 25V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M06 **Electrical Characteristics**

V_I=11V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	5.75	6.0	6.25	V
		I_O=5mA to 1A, V_I=9V to 21V, P_D<15W	5.65	6.0	6.25	V
Line Regulation	$\triangle V_O$	V_I=8.5V to 25V,T_J=25°C	--	--	120	mV
		V_I=9V to 13V,T_J=25°C	--	--	60	mV
Load Regulation	$\triangle V_O$	I_O=5mA to 1A,T_J=25°C	--	--	120	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	60	mV
Ripple Rejection	RR	V_I=9V to 19V, f=120Hz	--	68	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	$\triangle V_O/\triangle T$	I_O=5mA	--	0.8	--	mV/°C
Quiescent Current Change	$\triangle I_Q$	V_I=9V to 25V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M08 **Electrical Characteristics**

V_I=14V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	7.84	8.0	8.16	V
		I_O=5mA to 1A, V_I=11.5V to 23V, P_D<15W	7.7	8.0	8.3	V
Line Regulation	$\triangle V_O$	V_I=10.5V to 25V,T_J=25°C	--	--	160	mV
		V_I=11V to 17V,T_J=25°C	--	--	80	mV
Load Regulation	$\triangle V_O$	I_O=5mA to 1A,T_J=25°C	--	--	160	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	80	mV
Ripple Rejection	RR	V_I=11.5V to 21.5V, f=120Hz	--	62	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	$\triangle V_O/\triangle T$	I_O=5mA	--	1	--	mV/°C
Quiescent Current Change	$\triangle I_Q$	V_I=11.5V to 25V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M09 **Electrical Characteristics**

V_I=15V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	8.82	9.0	9.18	V
		I_O=5mA to 1A, V_I=12.5V to 24V, P_D<15W	8.65	9.0	9.35	V
Line Regulation	$\triangle V_O$	V_I=11.5V to 26V,T_J=25°C	--	--	180	mV
		V_I=12V to 18V,T_J=25°C	--	--	90	mV
Load Regulation	$\triangle V_O$	I_O=5mA to 1A,T_J=25°C	--	--	180	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	90	mV
Ripple Rejection	RR	V_I=12.5V to 22.5V, f=120Hz	--	61	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	$\triangle V_O/\triangle T$	I_O=5mA	--	1.2	--	mV/°C
Quiescent Current Change	$\triangle I_Q$	V_I=12.5V to 25V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M10 **Electrical Characteristics**

V_I=16V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	9.7	10	10.3	V
		I_O=5mA to 1A, V_I=13.5V to 25V, P_D<15W	9.6	10	10.4	V
Line Regulation	△V_O	V_I=12.5V to 28V,T_J=25°C	--	--	200	mV
		V_I=14V to 20V,T_J=25°C	--	--	100	mV
Load Regulation	△V_O	I_O=5mA to 1A,T_J=25°C	--	--	200	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	100	mV
Ripple Rejection	RR	V_I=13V to 23V, f=120Hz	--	61	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	△V_O/△T	I_O=5mA	--	1.3	--	mV/°C
Quiescent Current Change	△I_Q	V_I=13V to 28V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M12 **Electrical Characteristics**

V_I=19V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	11.5	12	12.5	V
		I_O=5mA to 1A, V_I=15.5V to 27V, P_D<15W	11.4	12	12.6	V
Line Regulation	△V_O	V_I=14.5V to 30V,T_J=25°C	--	--	240	mV
		V_I=16V to 22V,T_J=25°C	--	--	120	mV
Load Regulation	△V_O	I_O=5mA to 1A,T_J=25°C	--	--	240	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	120	mV
Ripple Rejection	RR	V_I=15V to 25V, f=120Hz	--	60	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	△V_O/△T	I_O=5mA	--	1.5	--	mV/°C
Quiescent Current Change	△I_Q	V_I=15V to 30V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

TK78M15 **Electrical Characteristics**

V_I=21V, I_O=500mA, 0<T_J<125℃, C_I=0.33μF,C_O=0.1μF,unless otherwise specified.


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V_O	T_J=25°C	14.4	15	15.6	V
		I_O=5mA to 1A, V_I=17.5V to 30V, P_D<15W	14.25	15	15.75	V
Line Regulation	△V_O	V_I=17.5V to 30V,T_J=25°C	--	--	300	mV
		V_I=20V to 26V,T_J=25°C	--	--	150	mV
Load Regulation	△V_O	I_O=5mA to 1A,T_J=25°C	--	--	300	mV
		I_O=250mA to 750mA,T_J=25°C	--	--	150	mV
Ripple Rejection	RR	V_I=18V to 28V, f=120Hz	--	60	--	dB
Dropout Voltage	V_D	I_O=1A,T_J=25°C	--	2	--	V
Quiescent Current	I_Q	T_J=25°C	--	--	8	mA
Temperature coefficient of V_O	△V_O/△T	I_O=5mA	--	1.8	--	mV/°C
Quiescent Current Change	△I_Q	V_I=18V to 30V	--	--	0.8	mA
		I_O=5mA to 1A	--	--	0.5	mA
Output Noise Voltage	V_N	10Hz≤f≤100kHz,T_A=25°C	--	42	--	μV

Package Dimension

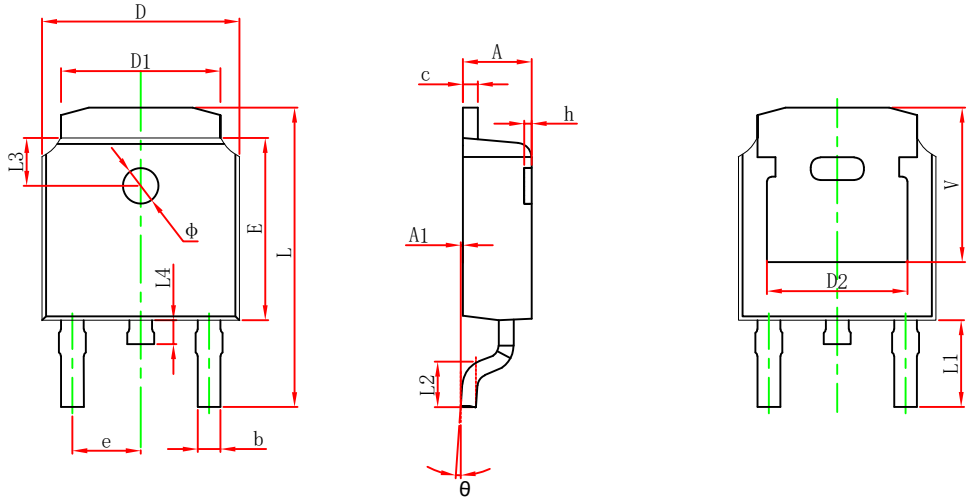

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.700	0.860	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.300	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

TO-252-2L Suggest Pad Layout

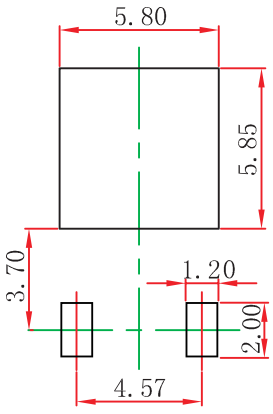

NOTE:

1. Controlling dimension: in millimeters.
2. General tolerance: ±0.05mm.
3. The pad layout is for reference purposes only.